
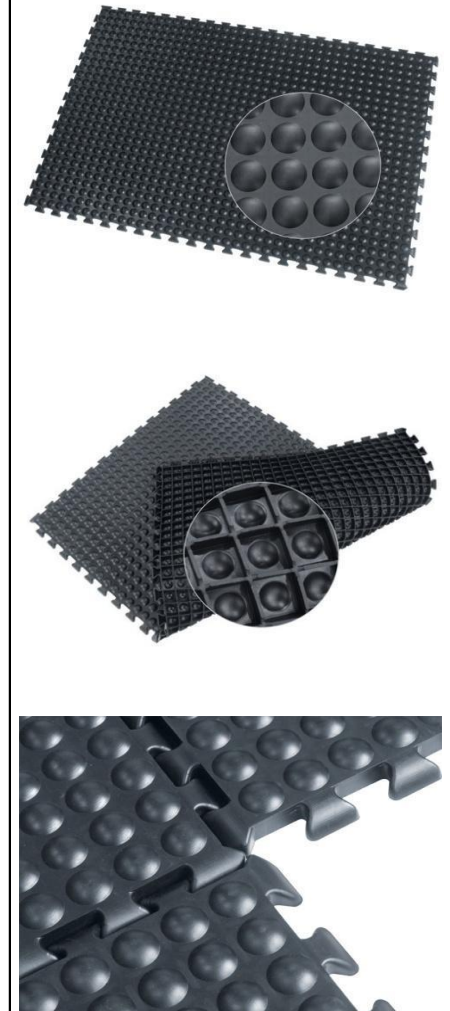



ESD Anti-Fatigue Mat

	Type A		Type B	Type C	Interlocking Type
Item Code	M15-M-002	M15-M-003	M15-M-001	M15-M-005	M15-M-004
Size	16mm x 600mm x 900mm	16mm x 450mm x 600mm	15mm x 600mm x 900mm	16mm x 600mm x 900mm	16mm x 600mm x 900mm
SR(ohm)	10e5~10e6		10e8~10e9	10e5~10e6	10e5~10e6
Color	Black		Grey, Brown	Black	Black
Materials	Conductive NBR +PU Foam		Polyurethane	Conductive NBR	Conductive NBR
Weight/pc	3.4kgs	2.1kgs	2.5kgs	3.5kgs	2.7kgs
Packings	5mats/carton	10mats/carton	10mats/carton	5mats/carton	7mats/carton

Pictures

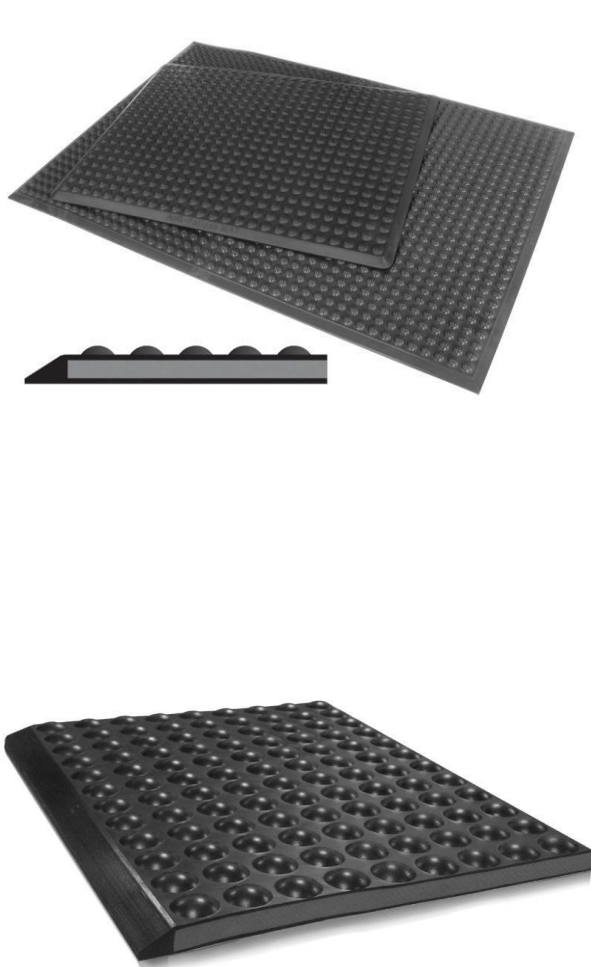

Spec sheet/ data sheet for ESD MAT

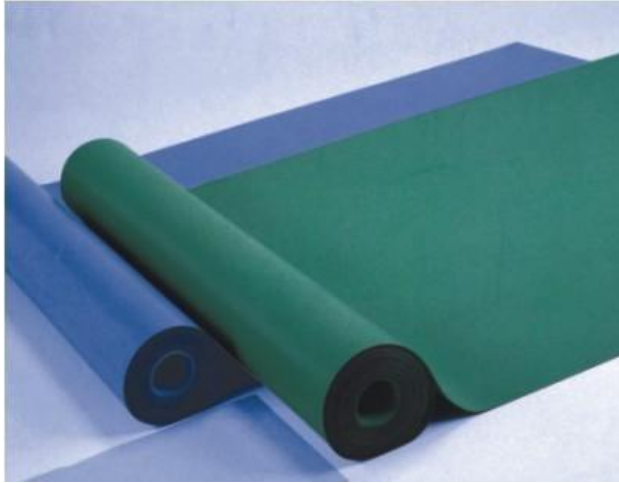

Style Name: ESD MAT

Size: 1m(0.6m,0.8m,0.9m)*10m*2mm

Thickness : 2mm

Color: Green/black

Product Description

IN.	Properties	Specification		Unit	Test Method
		Dissipative Layer	Conductive Layer		
1	Specific Gravity	1.6	1.7	-	ASTM-D792
2	Tensile Strength	90	78	Kg/Cm2	ASTM-D412
3	Elongation	110	110	%	ASTM-D412
4	Hardness	65	70	-	ASTM-2240
5	Tearing Strength	50	60	Kg/Cm	ASTM-D412
6	Surface resistivity	$1 \times 10^{6-9}$	$1 \times 10^{3-5}$	Ohm/Sq	ASTM-D412
7	Static Decay	< 0.1sec			FTMS 101C Method 4046.1